MODEL

KOMEX-Hydro-Trailer

Water is our basis.
Together with green energy, it is the basis for our natural weed control. A wide range of applications are possible due to the compact design of our devices.

- Weed removal
- Cleaning
- Plant watering
- Chewing gum removal
- Disinfection

KECKEX

www.keckex.com

KOMEX-Hydro-Trailer

TECHNICAL DATA

Electric drive low-pressure	battery-operated, up to 8 h continuous operation
Drive with Kohler-motor high-pressure	26 kW water-cooled diesel motor with Interpump pump 25 l/min, 220 bar, 1.450 rpm
Power supply	12 V DC, 250 Ah
Sound level electric drive	<79 dB, can be used anywhere without noise pollution
Sound level Kohler-motor	>79 dB
Temperature low-pressure	100 ... 130 °C, depending on the accessories
Temperature high-pressure	0 ... 65 °C, depending on the accessories
Water tank	500 l, possibility to draw in water from external tanks
Fuel tank	39 l
Fuel consumption	4 – 9,5 l/h, depending on the power-on time
Water pump low-pressure	11 – 13 l/min self-priming, 5 bar
Water pump high-pressure	15 – 25 l/min self-priming, 220 bar
Control panel & steering	digital
Basic dimensions	l/w/h ca. 322 cm x 172 cm x 153 cm
Dry weight	ca. 720 kg
Accessories	2x hose reel (15 m hot water, 15 m cold water), surface cleaner, separable hand lances for high and low pressure, aluminium tool box

SUITABLE FOR

- ✓ All vehicles with trailer hitch
- ✓ Pick-up trucks
- ✓ Electric vehicles
- ✓ Municipal vehicles

AREAS OF APPLICATION

- ✓ Communities / cities: for the service and maintenance of public facilities, parks, cemeteries, schools, playgrounds and sports fields, business areas, commercial properties, water protection zones, paths, forecourts of residential and public buildings, etc.
- ✓ Control of invasive plant species such as Japanese knotweed
- ✓ Cleaning of road signs, etc.
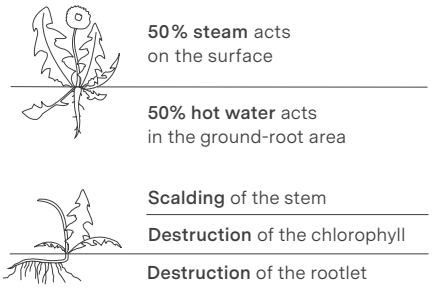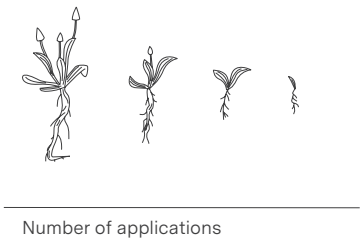
The KECKEX method is the most efficient way to eliminate weeds naturally. A hot steam mixture ensures that the weeds on the treated surface are combatted in the same way as the root system.